


WARD HARDWARE

Rod Lock II Tie Rod Installation Fasteners

H RL2

SPECIFICATIONS:

1. Zinc plated stud with spring steel seat plates
2. Zinc plated grade 5 bolt
3. Zinc plated washer with neoprene gasket
4. Thin wall conduit (not included)
5. Duct wall

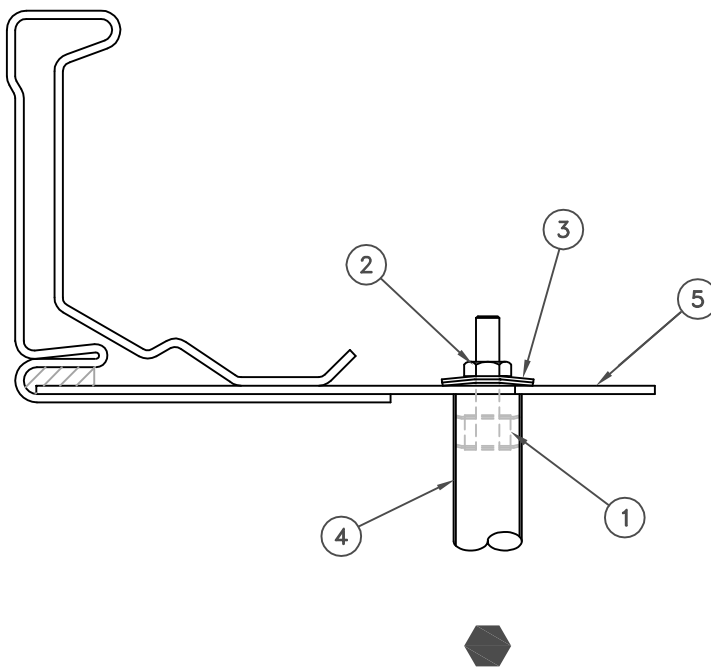

NOTES:

1. Quick and easy installation of Tie Rods with no sealant required.
2. Available in 1/2".
3. Use for both joint tie rods or center tie rods.
4. Consult SMACNA Duct Construction Standards for application specifications.
5. Pull tested to over 1900 lbs.
6. Use Rod Lock Tool for easy installation.

JOB NAME: _____
LOCATION: _____
ARCHITECT: _____
ENGINEER: _____
CONTRACTOR: _____

SUBMITTED BY: _____

WARD[™]
INDUSTRIES

5030 Corporate Exchange Blvd SE • Grand Rapids MI 49512
T (800) 624-8642 • F (800) 972-1421 • www.wardind.com